

MAKE IN INDIA - MAKING INDIA SECURE



Active - GD

2 Trigger Controlled by Password/ SMS with 32 Bit LCD keypad



Features

- 2 Trigger Available NO, NC (Normally Open/Close)
- 16 Texts Sms Option Available
- On Board Keypad With 32 Bit Lcd
- Arm/Disarm Through Password / Sms
- Changeable User Password
- Instant Call/Sms Alert For Trigger Open
- Individual Voice And Text Message Available For Both Trigger
- 20 Sec Recording Time For Individual Voice Message
- Built-In Gsm Communicator
- Memory Available To Store 10 Phone Numbers
- Receives Sms While Arm/Disarm
- Arm/Disarm By Sms Can Be Controlled By First Three Admin Numbers
- Balance Status Can Be Checked By Sms
- Recorded Message Playback Speaker Provision Available
- Control Panel Door Tamper Available
- External Relay For Trigger Mode And Application Mode
- In Application Mode Relay Can Be Operated By Sms
- Used For Both Intrusion And Fire Alarm Panel
- Control Through Android Application


GSM
AUTO DIALER



SPECIFICATION

Active - GD

2 Trigger Controlled by Password/ SMS with 32 Bit LCD keypad

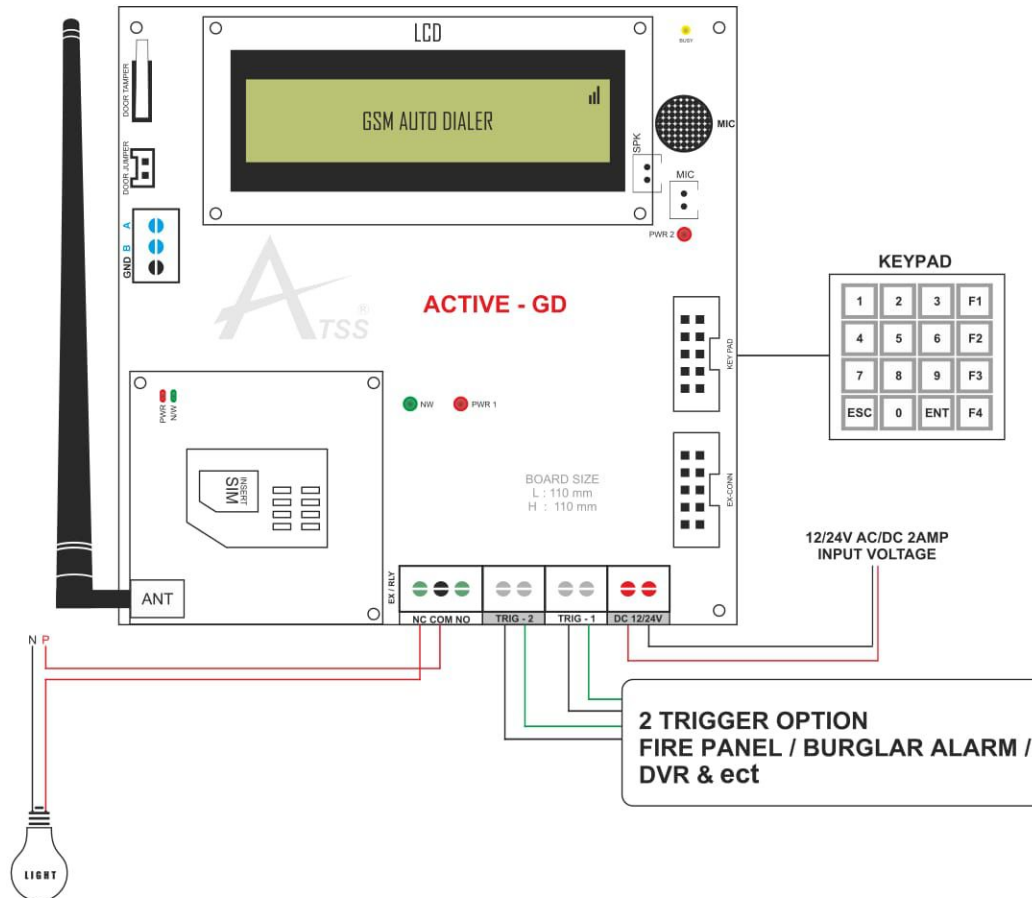

POWER SUPPLY	
Maximum Power Consumption	24 Watts
DC /AC Main Supply	12-24 V / 2 amps
ZONES	
Zone Response Time	< 500 Millisecond
Zone Loop Resistance	< 1 kilo Ohm For Normally Closed
Max Length of Sensor Cable (multi core cable)	150 m (Depends on cable resistance)
GSM Antenna	3 db required
RELAY-NORMALLY CLOSED	
Max Voltage/ current ratings	AC 240 V/5 A
ENVIRONMENTAL	
Environment	Residential/ Commercial/ Light Industrial
Max Humidity	95% Non-Condensing
Operating Temperature	0 °C To 45 °C
Storage Temperature	-20°C ~ + 60°C
PHYSICAL	
Colour	Grey Coloured Metal Box
Control Panel Dimensions(mm)	(H X W X L) = 150 X 45 X 130
Weight	570 g